


## URETHANE WHEEL CHOCK

Made of light weight, yet durable, molded urethane.

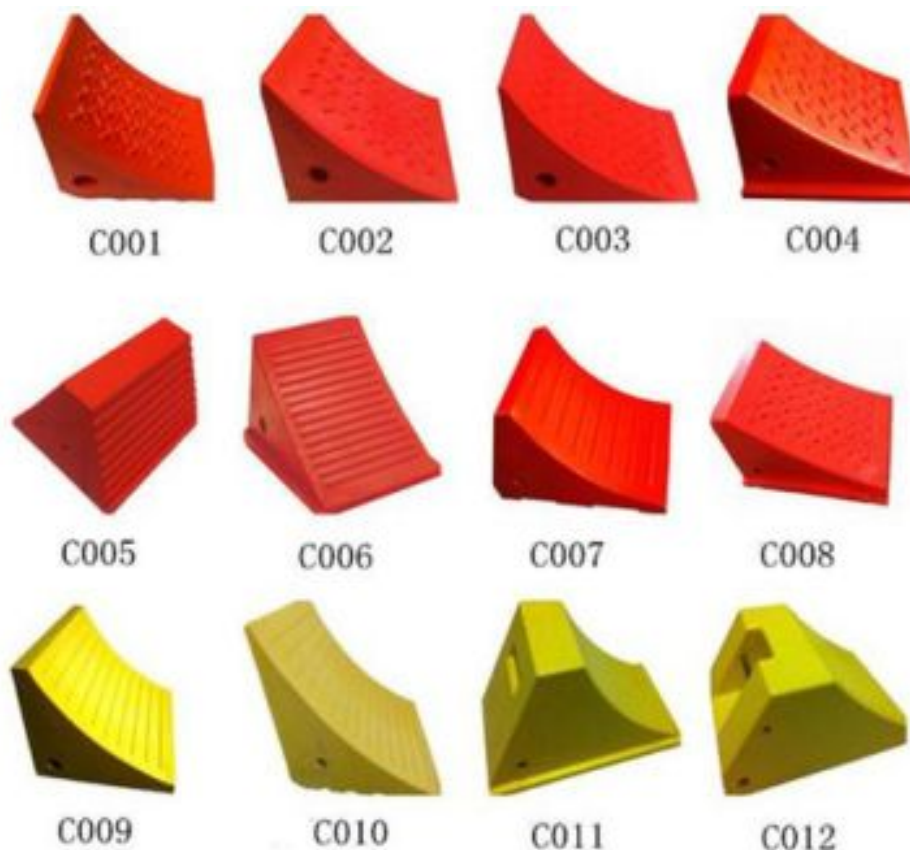

Modelo	Dimension largo*ancho*alturo	Diametro Adecuado Neumatico	Max. Carga	Peso
C001	200*174*147mm	650mm	5t	0.9kg
C002	215*176*155mm	560mm	10t	1.2kg
C003	280*200*200mm	816mm	20t	1.7kg
C004	205*200*147mm	900mm	20t	1.8kg
C005	235*195*145mm	570mm	20t	1.8kg
C006	287*224*206mm	890mm	30t	2.6kg
C007	355*204*204mm	580mm	30t	2.7kg
C008	332*215*193mm	1400mm	40t	3.5kg
C009	380*300*280mm	1020mm	60t	6kg
C010	440*370*370mm	1474mm	120t	9kg
C011	526*278*310mm	1120mm	135t	10kg
C012	550*373*270mm	3600mm	250t	17.7kg

## ***RUBBER WHEEL CHOCK***

Constructed of reinforced rubber to provide a sure grip on virtually any surface.

Curved surface contours to fit tires. Rubber resists tearing, abrasion, ozone weathering, etc. Functional design is durable in all weather conditions.



**ALL THE SIZES AND SHAPES CAN BE SUBJECT TO THE CUSTOMER'S REQUIREMENTS.**

## ***RUBBER BUMPER***

Laminated style bumpers provide durable, economical protection for your loading dock and trailers. Units are constructed of fabric reinforced rubber from recycled truck tires. Pads are laminated between painted structural angles and held together with steel tie rods. Installation is quick and easy by bolting or welding units to the dock.

Type A



Type B



Type C



All the sizes and shapes can according to the customer' s requirements.

**29F, NEW WORLD MANSION, 9, FUZHOUNAN ROAD, QINGDAO, CHINA. POSTAL-CODE: 266071**

**Tel: 0086-532-85724786      Fax: 0086-532-85724957**