

CAR LIFT

Model: 2D40E

2D40E



TECHNICAL DATA

Lifting capacity	4000kg	ise time	≤65sec
Car max Lifting height	1850m m	Descent time	18sec≤t≤60sec



Clearance between posts	2830m m	Operating temperature	10°C/50°C
Overall height	2826m m	Net weight	680kg
Overall width (total)	3470m m	Power supply	2.2KW (380/220v) 50/60Hz
Long arm maximum length	1390m m	Oil pressure	16Mpa
Short arm maximum length	1310m m	Oil tank	10L



SMI

Shandong Sound Metals & Machinery INC.

Two Post Lift

Model: TPF209



Technical data:

Low ceiling design

Dual-cylinder two post

Automatic safety locks

Automatic arm restraints

Cable-equalization system

Maintenance free load bearing.

29F, NEW WORLD MANSION, 9, FUZHOUNAN ROAD, QINGDAO, CHINA. POSTAL-CODE: 266071

Tel: 0086-532-85724786

Fax: 0086-532-85724957

Plastic powder coat finish

Free truck adopters

Specification:

Model	TPF209
Lifting capacity	9000lbs/4ton
Overall length	2857mm
Overall width	2677mm
Max. lifting height	1900mm
Voltage	220V/380V
Drive through	2464mm



Two Post Lift

Model: TPO209



- **Solution for everyday repair work.**
- **Easy to operate.**
- **Clear floor design.**
- **Dual-cylinder two post.**
- **Automatic safety locks.**
- **Automatic arm restrains.**
- **Cable-equalization system.**

- Automatic stop bar.
- Single-place columns.
- Maintenance Free load Bearing.
- Plastic power coat finish.
- Free truck adopters.

Specification:

Model	TPO209
Lift weight	4200Kg
Lift height	1800mm
Total height	3672mm
Width between column s	2677mm
Car way width	2430mm
Voltage	220V / 380V



SMI

Shandong Sound Metals & Machinery INC.

Two Post Lift

Model: TPO209E



Technical data:

Solution for everyday repair work.

Easy to operate.

Clear floor design.

Dual-cylinder two post.

Automatic safety locks.

29F, NEW WORLD MANSION, 9, FUZHOUNAN ROAD, QINGDAO, CHINA. POSTAL-CODE: 266071

Tel: 0086-532-85724786

Fax: 0086-532-85724957

Automatic arm restraints.

Cable-equalization system.

Automatic stop bar.

Single-piece columns.

Maintenance free load bearing.

Plastic powder coat finish.

Free truck adopters.


Electric Release Lock

Specification:

Model	TPO209E
Lifting capacity	9000lbs/4ton
Overall length	3683mm
Overall width	2677mm
Max. lifting height	1900mm
Motor capacity	220V/380V
Drive through	2464mm

Two Post Lift

Model: TPO310AC

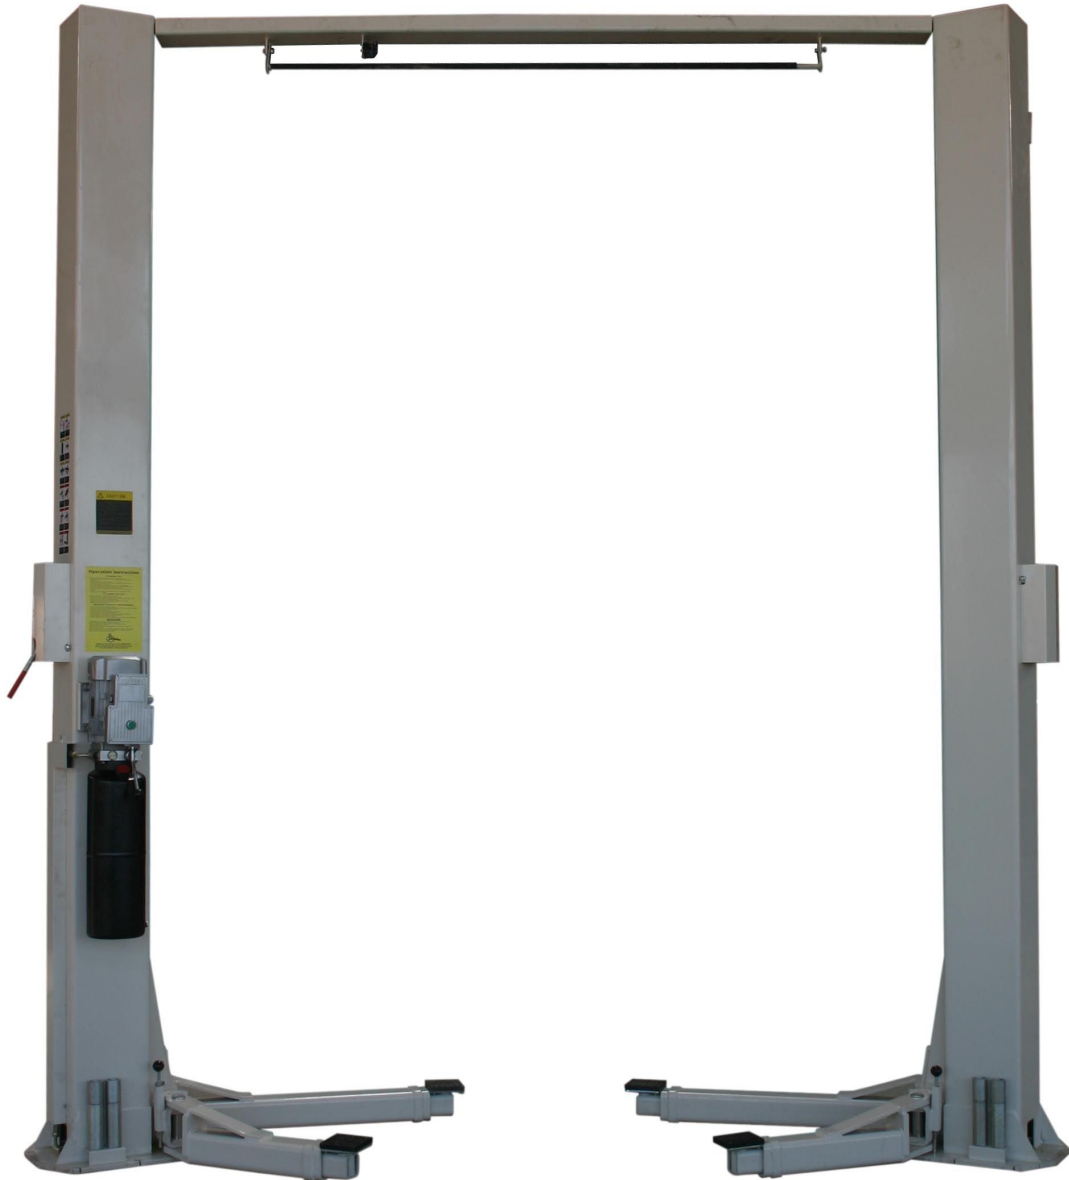

- **True Asymmetrical Design.**
- **30Degree rotated columns.**
- **Maximum door opening for improved access.**

29F, NEW WORLD MANSION, 9, FUZHOUNAN ROAD, QINGDAO, CHINA. POSTAL-CODE: 266071

Tel: 0086-532-85724786 Fax: 0086-532-85724957

- Single piece column for maximum strength.
- Plastic power coating for durability and environment safety.
- Free Truck and Van adopters Auto shut off low profile lift arm.
- Taller lift carriages to minimizes stressm on columns.
- Cable adjusting windows on each lift carriage for easy installation.

Specification:

Model	TPO310AC
Lift weight	4500Kg
Lift height	1961mm
Total height	3672mm
Width between column s	2635mm
Car way width	2240mm
Voltage	220V / 380V

Four Post Lift

Model: WH-3.5F

Four post lift



WH-3.5F WH-4.5F
WH-4.0F WH-5.0F

(Specification Fields)

Model	Power Supply	Air Supply	Power	Lifting Capacity	Max Lifting Height
GC-3.5F	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	3.5T	170~1770mm
GC-4.0F	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.0T	196~1846mm
GC-4.5F	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.5T	196~1846mm
GC-5.0F	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	5.0T	196~1846mm
GC-5.5F	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	5.5T	196~1846mm

Four Post Lift

Model: WH-3.5F4

Four post alignment lift



WH-3.5F4 WH-4.5F4
 WH-4.0F4 WH-5.0F4

(Specification Fields)

Model	Power Supply	Air Supply	Power	Lifting Capacity	Max Lifting Height
GC-3.5F4	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	3.5T	220~1820mm
GC-4.0F4	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.0T	246~1896mm
GC-4.5F4	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.5T	246~1896mm
GC-5.0F4	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	5.0T	246~1896mm
GC-5.5F4	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	5.5T	246~1896mm

Scissor Alignment Lift

Model: WH-3.5MS

Double-level platform scissor alignment lift



WH-3.5MS

WH-4.5MS

WH-4.0MS

WH-5.5MS

(Specification Fields)

Model	Power Supply	Air Supply	Power	Lifting Capacity of Main Lift	Lifting Height of Main Lift
GC-3.5MS	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	3.5T	330~1850mm
GC-4.0MS	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.0T	330~1850mm
GC-4.5MS	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	4.5T	330~1850mm
GC-5.5MS	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	5.5T	330~1850mm

Scissor Lift

Model: WH-3.5S

Small platform double scissor lift(Single extension)

WH-3.5S



(Specification Fields)

Model	Power Supply	Air Supply	Power	Platform Length	Lifting Capacity	Max Lifting Height
GC-3.5S	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	1440~1740mm	3.0T	330~2160mm
GC-3.5S	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	1440~1740mm	3.5T	330~2160mm
GC-3.0SB	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	1440~2040mm	3.0T	330~2160mm
GC-3.5SB	380V/3PH or 220V/1PH	6~8kg/cm ²	2.2KW	1440~2040mm	3.5T	330~2160mm

